

Assembly Directions for Sections with Clips


Important: Do not install clips into the pickets until directed to do so. When sliding the pickets through the rails, the holes for the clips must be on the SIDE of the picket, not the front. (See drawings below.)

Note: For fence styles with a header (a horizontal rail with no holes in it), put the header aside until the last assembly step.

1. Lay the rails (also called “stringers”) on a flat surface, then slide the pickets without any clips installed through the square holes of the stringers. Make sure that the holes in the pickets for the clips are located on the side of the picket, not the front, as you are sliding the pickets into place. All picket holes for the clips should face in the same direction.
2. After all the pickets are in place, position the pickets and rails so that the holes for the clips are below the stringer that they will snap into.

Do not stand section up until you complete the next two steps!

3. Push the clips into the holes in the pickets, making sure that the clips are on the side of the pickets and below the rail. When installed correctly, the clips look like an inverted “V” from the side. (See figure at right.) Once the clips are in, they cannot easily be removed so make sure they are facing the right way!

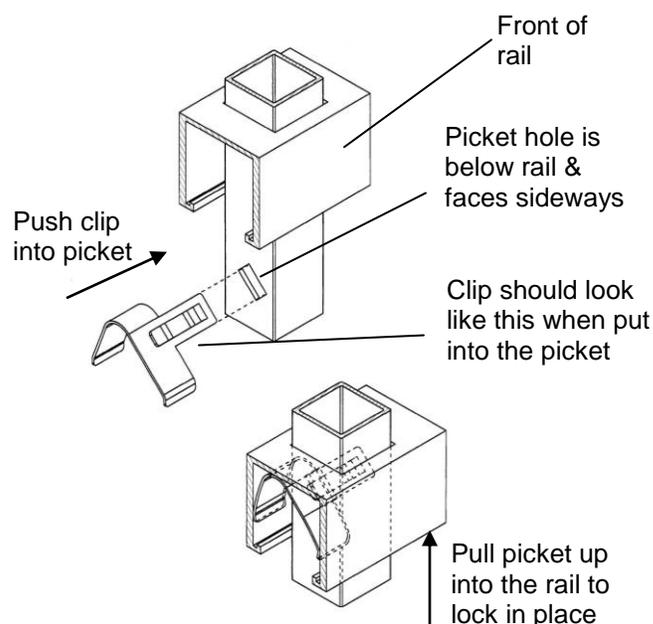

4. Starting at one end, clip the bottom rail into place by holding bottom stringer and pulling the pickets up into the stringer until they snap into place.
5. Stand up fence section after the bottom rail is secured.
6. Working from one end, push the next lowest stringer down over the clips until all pickets are locked in place. Continue for each rail.
7. If the section has a header, place the header on top and snap it into place by working from one end towards the other.
8. The section is now complete and ready for installation!